

SIDING

THE SUSTAINABLE ALTERNATIVE TO TROPICAL HARDWOOD SIDING.


XTR is perfect for architectural designs requiring natural elements on exterior walls. Durable and stable, install with our RainClad® Clip Installation System on sheathing or battens.



END MATCHED
Tongue & Grooved Ends
Allows installation on or off the joists

SMOOTH FACE SHIPLAP

5-3/8" RainClad® Siding with tongue and groove end-match



XTR-SID18-137TG-PP 1x6 T&G RainClad® Siding
EPC-SID18-137TG-PP 3/4" x 5-3/8" x 72" Pre-Primed (18 x 137 x 1829mm Pre-Primed)

ASD-RC3S-W Sheathing Fastener
for use with RainClad Siding Plank

ASD-RFT-137G RainClad Fastrak
for 6" (137mm) Siding

ASD-RFT-178G RainClad Fastrak
for 6" (178mm) Siding



United States Patent No. US8,709,578 B2
European Union Patent No. 08800590.5
China Patent No. ZL200810093764.4

CLASS A FIRE RATING

dassoXTR
Fused Bamboo® for Exterior Use

DASSO USA
6060 Boat Rock Blvd SW, Suite 800,
Atlanta, GA 30336 USA
P +1.404.691.6872
info@dassoXTR.com
dassoXTR.com

dassoXTR
Fused Bamboo® for Exterior Use

BEAUTIFUL
INNOVATIVE
DIMENSIONALLY STABLE
PERFORMANCE ENGINEERED

2 COLORS AVAILABLE

CLASSIC **EPIC**


DECKING & MARINA

**DASSO'S PATENTED FUSION PROCESS
CREATES A DENSE, ENVIRONMENTALLY
FRIENDLY, STABLE DECKING.**




- END MATCHED** – Tongue & Grooved Ends
Allows installation on or off the joists
- REVERSIBLE FACES** – unlimited design possibilities
Install smooth or reeded face up
- G2 2 SIDE GROOVED** – for main deck use with hidden fastening clips onto joists
- G1 1 SIDE GROOVED** – for use as deck nosing / stairs / trim / fencing & more.


3/4" / 20mm
Residential Decking



1-1/2" / 40mm
Commercial Decking
offers all of the above except side groove



Wing Clip Fastener
ADK-WC-100

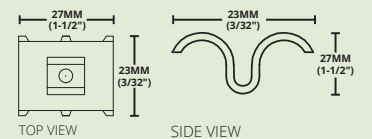

XTR-DK20-G2-PP/M 3/4" Double Groove Decking
EPC-DK20-G2-PP 3/4" x 5-3/8" x 72-3/4" Pre-Primed (20 x 137 x 1850mm)

XTR-DK20-G1-PP/M 3/4" Single Groove Decking
EPC-DK20-G1-PP 3/4" x 5-3/8" x 72-3/4" Pre-Primed (20 x 137 x 1850mm)

XTR-DK40-G0-PP/M 1-1/2" Decking
EPC-DK40-G0-PP 1-1/2" x 5-3/8" x 72-3/4" Pre-Primed (40 x 137 x 1850mm)

Fused Bamboo® offered in
DECKING | RAINCLAD® SIDING
PORCH FLOORING | LUMBER & PANELS
SOFFIT, DECK SKIRTING & WAINSCOTING



PORCH



SOFFIT



OEM & DIY



 **dassoXTR**
Fused Bamboo® for Exterior Use

Over 100 Million SqFt
Installed Worldwide


 **Class A
Fire Rating**


dassoXTR FUSED BAMBOO® PORCH FLOORING WELCOMES VISITORS WITH AN UNMATCHED ELEGANCE UNIFYING YOUR OUTDOOR SPACES.



dassoXTR bamboo porch flooring has a tongue and groove fit, and outperforms common porch flooring in aesthetics and durability.

 **END MATCHED**
Tongue & Grooved Ends
Allows installation on or off the joists

 **REVERSIBLE FACES**
Unlimited design possibilities
Install smooth or needed face up




dassoXTR Fused Bamboo® reversible tongue and groove Porch Flooring is ideal for covered walkways and porches to provide a more interior look.


 **XTR-POR18-96-PP** **4" Porch Flooring**
 **EPC-POR18-96-PP**
3/4" x 3-3/4" x 72"
(18mm x 96mm x 1829mm)

dassoXTR FUSED BAMBOO SOFFIT, DECK SKIRTING AND WAINSCOTING IS DESIGNED FOR INTERIOR AND EXTERIOR USE WITH NO LEACHING AND ZERO VOC.




 **END MATCHED**
Tongue & Grooved Ends
Allows installation on or off the joists

 **SMOOTH FACE SHIPLAP**





SHORT SIDE OUTLINE



LONG SIDE OUTLINE

dassoXTR Fused Bamboo® 4" soffit, deck skirting and wainscoting is pre-primed, reversible, and ideal for creating a long-lasting, elegant indoor or outdoor environment.



 **XTR-SOF12-100TG-PP** **4" Soffit & Wainscoting Shiplap**
 **EPC-SOF12-100TG-PP**
1/2" x 3-30/32" x 72"
(12mm x 100mm x 1829mm)



USE XTR LUMBER AND PANELS TO TRIM YOUR PROJECTS AND BUILD COORDINATED SITE FURNISHINGS, PRIVACY SCREENS, FENCES, GATES, RAILINGS AND MORE.



Lumber offered in 3/4" (20mm) & 1-1/2" (40mm) thicknesses



dassoXTR fused bamboo lumber is unfinished lumber—it is S2S+RE2 (sides need to be planed). The material is not pre-primed allowing the end-user endless finishing possibilities.



 **XTR-LUM20-205/M** **1 X 8 nominal S4S Lumber**
 **EPC-LUM20-205/M** 3/4" x 8" x 73-1/4" (20 x 205 x 1860mm)

 **XTR-LUM40-152/M** **2 x 6 nominal S4S Lumber**
 **EPC-LUM40-152/M** 1-1/2" x 6" x 73-1/4" (40 x 152 x 1860mm)

Panels offered in 3/4" (20mm) & 1-1/2" (40mm) thicknesses

- » dassoXTR fused bamboo panels are unfinished—not pre-primed.
- » Panels come oversized to trim in two sizes: 1-1/2" x 2' x 6' and 3/4" x 2' x 6'.
- » Use dassoXTR panels to create outdoor furnishings for years of lasting beauty.

 **XTR-PAN20H** **1" Half Panel**
 **EPC-PAN20H** 3/4" x 24" x 73-1/4" (20 x 623 x 1860mm)

 **XTR-PAN40H** **2" Half Panel**
 **EPC-PAN40H** 1-1/2" x 24" x 73-1/4" (40 x 623 x 1860mm)

30 YEAR LIMITED RESIDENTIAL WARRANTY

- » Manufactured using a patented process to ensure lasting outdoor beauty and enjoyment.

DESIGN FEATURES

- » Look and feel of natural wood. Performs like dense tropical hardwoods.
- » Periodic recoating as outlined in our maintenance instructions is recommended If not maintained periodically with oil, XTR will silver as it ages (like all natural wood).
- » Consistent precision of a manufactured product.

TECHNICAL HIGHLIGHTS

- » Class A fire rating per ASTM E84.
- » Zero VOC Allows Interior or Exterior Usage.
- » 300% harder than Red Oak (1260)

LEARN MORE AT DASSOXTR.COM

- » Visit dassoXTR.com for copies of our installation and maintenance instructions and warranties.

dassoXTR FUSED BAMBOO COMPARISON

SKU	dassoXTR Classic	dassoXTR Epic	Ipe/Brazilian Walnut	Meranti Batu	Western Red Cedar
Density lb/ft3 (kg/m3)	69 (1,100)	75 (1,200)	66 (1,060)	53 (850)	23 (370)
Strength MOR psi (MPa)	11,922 (82)	17,730 (122)	19,173 (132)	17,259 (119)	7,498 (52)
Stiffness MOE 1000 psi (MPa)	2,101 (14,490)	2,013 (13,880)	3,200 (22,070)	245 (16,950)	1,100 (7,584)
Janka Hardness Newton (lbf)	16,992 (3,820)	17,659 (3,970)	15,620 (3,510)	7,117 (1,600)	3,110 (700)
Shrinkage longitude %	0.02	0.06	0.16	0.17	0.20
width %	0.40	1.20	5.90	5.50	2.40
thickness %	1.90	3.70	7.20	10.10	5.00