



1 PREPARE



3 MAINTAIN

EXTERIOR WOOD CARE

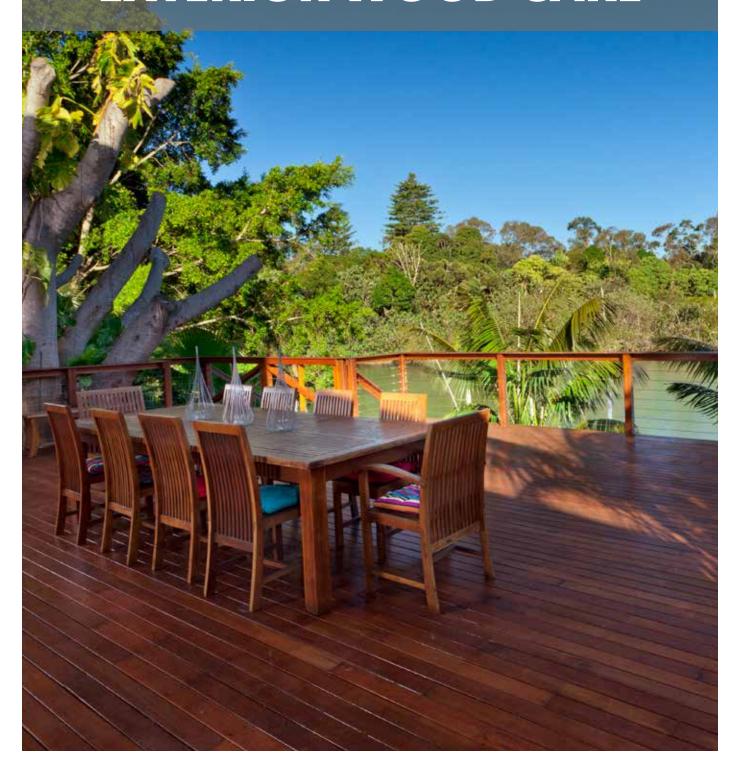


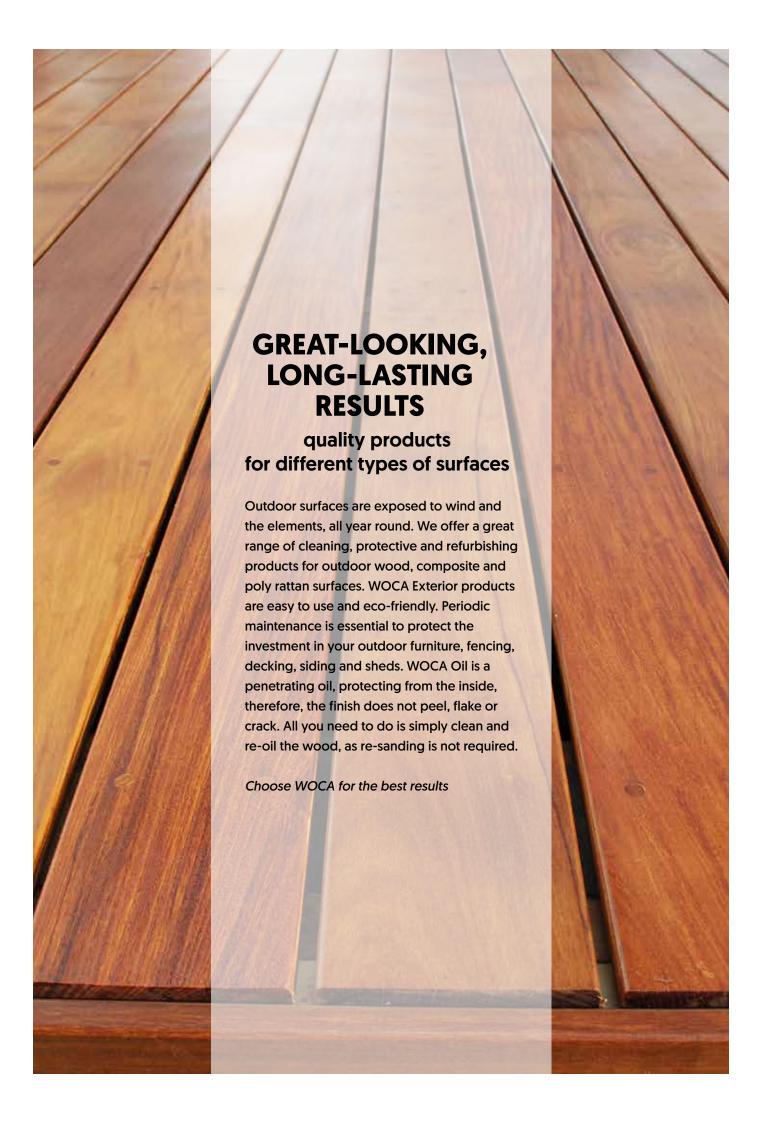





EXTERIOR WOOD CLEANER





WOCA Exterior Wood Cleaner is for the cleaning of wood decking, garden furniture, siding, fences, doors, carports etc. The product removes green growth and dirt.


- Removes moss and algae growth, prolonges resettlement
- Suitable for decking, garden furniture, cladding and siding
- Manual or mechanical cleaning
- Not harmful to vegetation
- No need for pressure washing. Cleaning with WOCA Exterior Cleaner

forces less moisture into the wood than pressure washing.

How to

Mix Exterior Wood Cleaner with water in a ratio of 1:2 - 1:10, depending on how dirty the wood is. Apply the cleaner in an even coat, using a brush or spray nozzle. Leave the cleaner to work for five minutes. Scrub with the wood grain using WOCA's terrace brush or a similar stiffbristled brush, until the surface is clean. Repeat if necessary. Rinse the surface with plenty of water and leave the wood to dry for a minimum of 24 hours.

EXTERIOR WOOD PRIMER






WOCA Exterior Wood Primer is a water based product for priming outdoor wood like e.g. facades, windows, fences etc. It improves adhesion and durability. The product is used primarily for pine, larch, spruce, oak and old pressure-treated wood (except red cedar).

- Special primer for highly absorbative wood
- Fast drying
- Penetrates and protects
- Requires aftertreatment with WOCA Exterior Wood Oil


How to

Shake the container well.

Apply Exterior Wood Primer undiluted, with a brush or roller. It is important that the product is applied thoroughly and evenly. Start with the end sections of the wood. The treatment must be performed in dry weather, at a temperature between 59-86 F. Avoid direct sunlight and intense heat. Wood humidity must not exceed 17%. Leave the wood to dry for at least 24 hours before treatment.

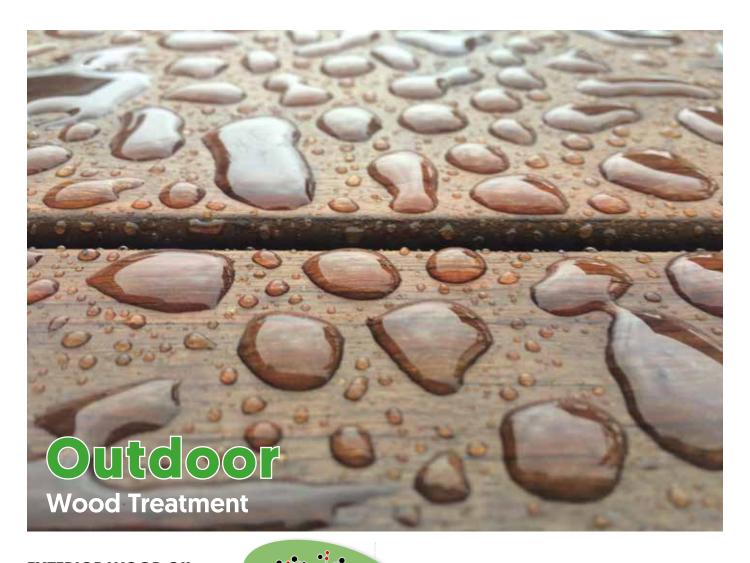

EXTERIOR WOOD OIL





WOCA Exterior Wood Oil is used outdoors for basic treatment and maintenance of new and previously oiled wood surfaces such as decks, garden furniture, siding, fencing etc.

- Provides a hard-wearing surface
- Delays emergence of mold and fungus
- May be used on all wood species, especially Exotic woods
- Contains UV protection
- Fast drying non film forming
- For refinishing simply clean and recoat, no sanding required


How to

Stir the oil thoroughly before use. Apply an even and thin coat of oil with a brush. Treat the end grain wood first. The wet oil may have a white shade. When the water has evaporated after a few minutes, the wood will appear oiled. Wipe off any excess oil with clean cotton cloths after no more than 5 minutes. Take particular care of removing excess oil from joints and grooves. If the surface does not appear saturated with oil, repeat steps.

When the wood is dry, it may be polished with a polishing pad or polishing machine to ensure an extra hard-wearing surface.



EXTERIOR MULTI CLEANER





Exterior Multi Cleaner is a product especially developed for cleaning exterior garden furniture made of Poly Rattan, wood, steel, PVC etc.

- Ready mixed easy to use
- Also suitable for universal cleaning of other exterior items such as window frames, claddings etc.
- Ecologically friendly product
- Combine with WOCA Exterior Multi Protector (use Cleaner first)

How to

Spray Exterior Multi Cleaner onto the wet surface from a distance of approx. 8-12" in a thin, even layer until the surface appears saturated. Carefully scrub the surface using a sponge or brush and rinse with water.

Dry down with a lint-free cotton cloth and leave the surface to dry for approx. 2 hours.

EXTERIOR MULTI PROTECTOR

	0.75 L
	_
	Water based
VOC	Free
W	_



WOCA Exterior Multi Protector is a product developed for rejuvenating, protecting, strengthens and extends the life of exterior garden furniture made of Poly Rattan, wood, steel, plastic etc.

- Suitable for universal maintenance of other exterior items such as window frames, siding etc.
- Ready mixed easy to use
- Provides a unique water resistant surface
- An ecologically friendly product
- Combine with WOCA Exterior Multi Cleaner (use Cleaner first)

How to

Spray a thin layer of Exterior Multi Protector over the entire surface from a distance of approx. 8-12" and leave to stand for approx. 30 min. Carefully wipe off the surface using a lint-free cotton cloth, to remove any excess liquid.

Leave the surface to dry for 4-5 hours before use.

ACCESSORIES – Outdoor tools



Silicium carbide brush 16"

No:	88050-U
Unit:	1 pc.
Product:	16" - hard universal

Hard brush that penetrates in depth without sanding the wood.



Silicium carbide brush

No:	88055
Unit:	1 pc.
Product:	Hard, universal

Fits with WOCA telescope stick #599651.



Outdoor Scrubbing Brush

No:	599601
Unit:	1 pc.
Product:	Universal

Fits with WOCA telescope stick #599651.



Telescope stick

	-	
No:	599651 - Alu	
Unit:	1 pc.	

Fits with WOCA doodlebug handles, wipers and roller holder.



Applicator for oils

No:	880151
Unit:	1 pc.
Product:	9"

For simplified application of oil. Fits with WOCA Metal Stick #880154.



Replacement pad

No:	880153
Unit:	10 pcs.
Product:	9"

Fits with WOCA Applicator #880151.



Metal stick

No:	880154
Unit:	1 pc.
Product:	Divisible

Fits with WOCA Applicator #880151.



Ecological products for more than 45 years



EN 71-3

The migration of metals (As, Hg, Se, Cr, Sb, Cd, Pb, Ba) of the sample was tested according EN 71 Part 3 2013

There was no evidence for migration of the named metals above the limit of detection (10-50 ppm). All products for the interiors are correspondingly suitable for toys.



IBR

WOCA Denmark's products are tested in neutral laboratories, e.g. by the Institue of Biological Building Materials in Rosenheim and are approved and certified. The impact on the health of people and environment of the methods of production and the products that are used for building, furnishing and living is examined.



VOC

The VOC Directive, devised by the European Parlament and the Council of Europe, defines the directive limiting emissions for certain pollution causing volatile organic compounds, called VOCs.

All WOCA Denmark products meet the VOC Directives for 2007 and 2010.



Danish Indoor Climate Labelling

Danish Indoor Climate Labelling is a voluntary labelling scheme for products and materials which are able to document degassing. Indoor climate labelled materials are a natural component of sustainable construction, where good indoor air quality contributes to social sustainability.



A+

Since September 2013, all floor coating products marketed and sold in France are obliged to be labelled with a VOC classification ranging from grade A+ (very low emissions) to grade C (high emissions). The aim is to improve indoor air quality in both private and commercial buildings. This regulation enables consumers to select environmentally friendly products as well, as the grade A+ guarantees an emission of volatile substances below the limit value after 28 days – a limit value identical with the one prescribed by the Center of Competence in Civil Engineering (DIBt).



The Nordic Swan

The Nordic Swan is the official Nordic environmental label. The Nordic Swan was formed by the Nordic Council of Ministers in 1989. Denmark joined in 1997. The Nordic Swan aims to minimise the cumulative environmental stress caused by consumerism. Accordingly, these environmental labels consider the entire journey of the product and the resulting environmental problems, so as to benefit people, the environment and protect the world's resources. In cleaning products, this means that numerous chemicals are banned. Packaging and design are also subject to requirements. Consumers must be provided with information about correct dosage, and effectiveness must be documented.



Anti Slip Test DIN 51130

WOCA Diamond Oil, WOCA Hardwax Oil and WOCA Invisible Oil have been tested on solid wood, and achieved a R10 clasification according to DIN 51130. For more information, please contact WOCA Denmark A/S.



DIBt regulation

Our industrial products are all registered by DiBt for manufactures selling to the German



Fire rating EN ISO 9239-1

WOCA Diamond Oil and WOCA Hardwax Oil have been tested on solid wood, and achieved a Cf1 fire rating according to EN ISO 9239-1. For more information, please contact WOCA Denmark A/S.

Distributor:		

